
OUTPUT DEVICE CONFIGURATION

Confidential Document

APPLIES TO:

OUTPUT DEVICE CONFIGURATION

SUMMARY

This article explains how to Perform the OUTPUT DEVICE CONFIGURATION.

AUTHOR:

K.VENKATA RAMU.

COMPANY:

WILLSYS INFOSYSTEMS Pvt. Ltd.,

CREATED ON:


10th Feb 2015.




OUTPUT DEVICE CONFIGURATION

1. Execute **SPAD** for Printer Configuration

Select **Output Devices** -> **Display**

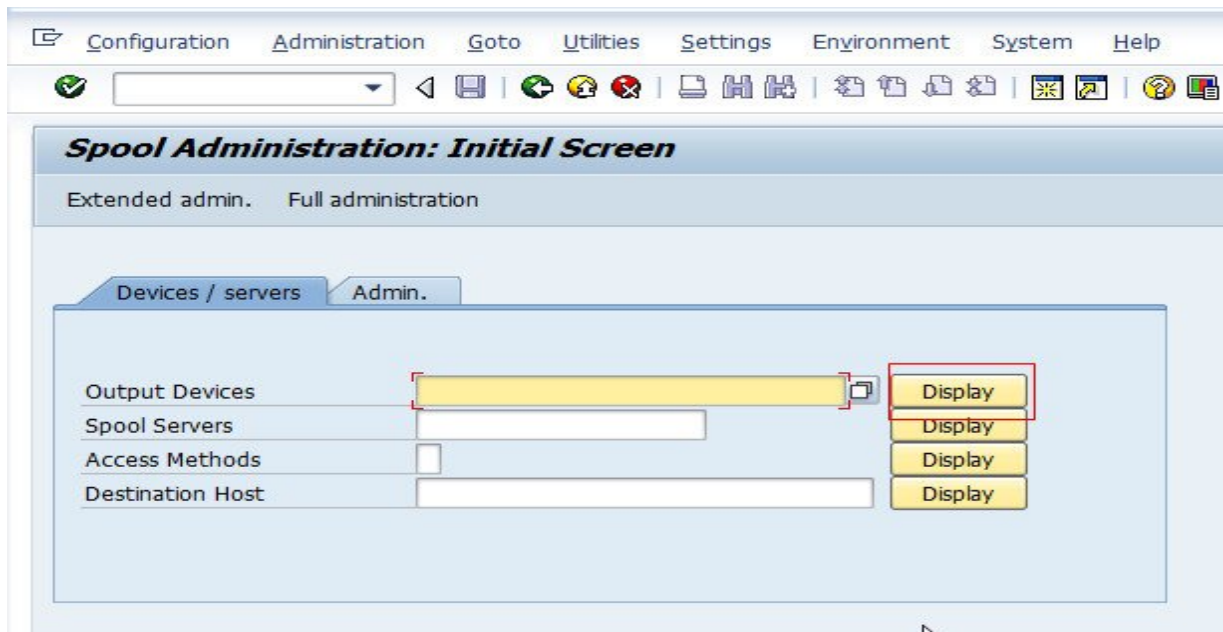

2. Now click on **Change** button to create new output device by selecting **Create**

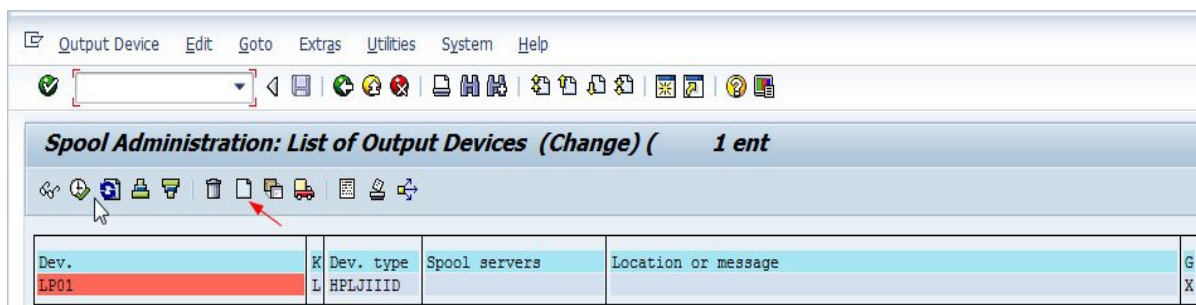

OUTPUT DEVICE CONFIGURATION


Confidential Document

3. Now fill-in fields as needed on the below screen:

Output Device – **HPLJ3050** -> Short Descrp - **HPL**

a) Device Attributes: **Output device --- Device type**

(In case of incompatibility of predefined drivers then use SWIN and SAPWIN)

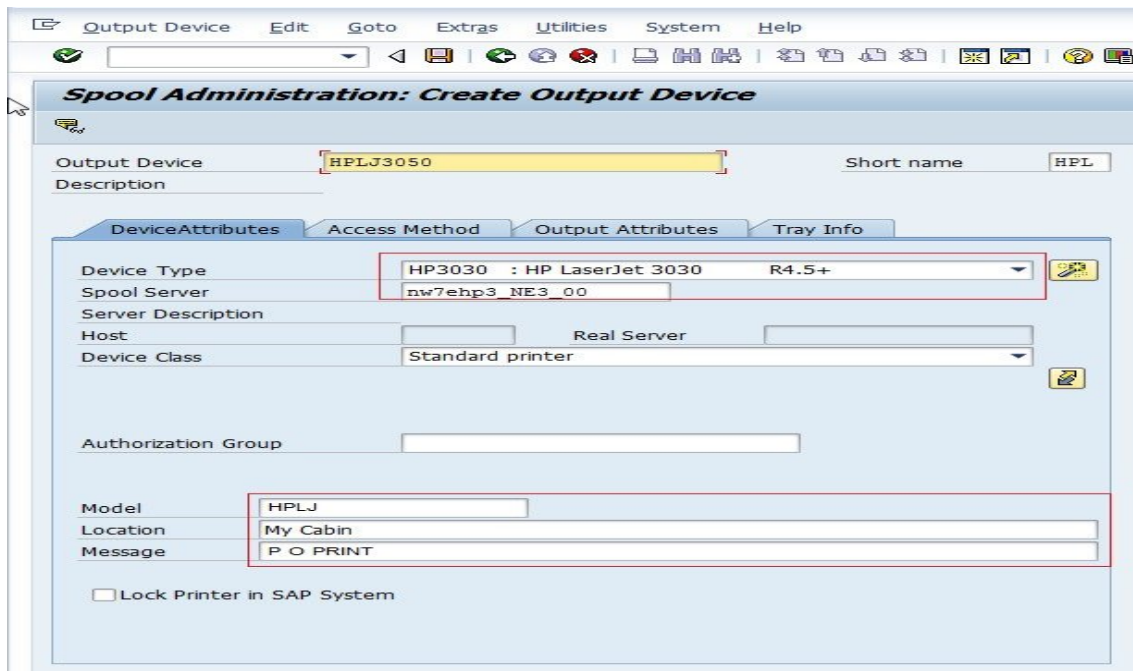


The screenshot shows the 'Spool Administration: Create Output Device' dialog box in SAP. The 'Output Device' field is set to 'HPLJ3050' and the 'Short name' is 'HPL'. The 'Device Attributes' tab is selected, showing the following fields: 'Device Type' (HP3030 : HP LaserJet 3030 R4.5+), 'Spool Server' (nw7ehp3_NE3_00), 'Server Description', 'Host', 'Real Server', 'Device Class' (Standard printer), 'Authorization Group', 'Model' (HPLJ), 'Location' (My Cabin), and 'Message' (P O PRINT). There is a checkbox for 'Lock Printer in SAP System' which is unchecked.

b) Access Method:


Host Spool Access Method --- Host Printer --- Host Name

Select the check box “ Do not Query host spooler”

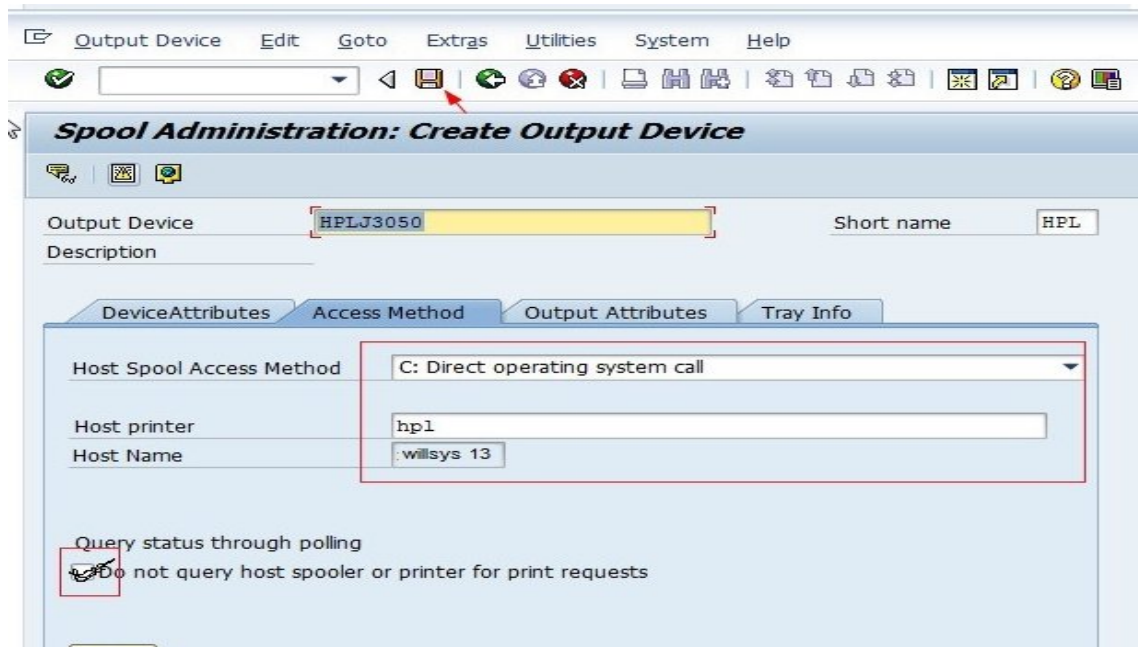


C) Out put Attributes:

Select the below options based on printing requirement.

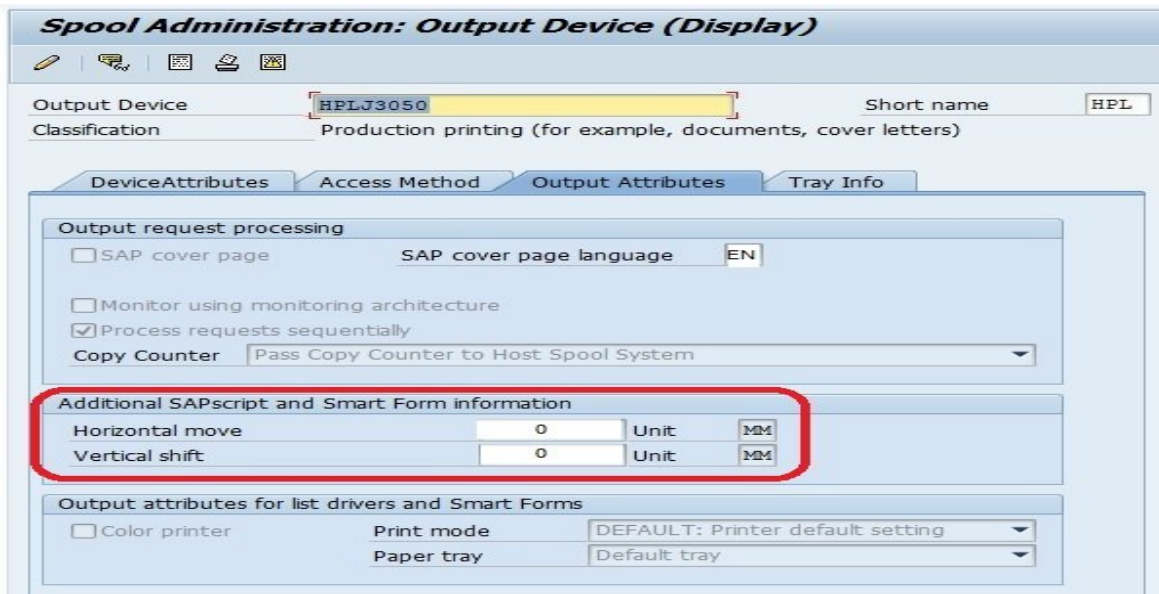


d) Similarly select the tab **Tray Info** and specify the **tray information** then **save** it.


- Now the **HPLJ3050 printer** is ready to use for printing in an SAP system. To use this output device, send sample data to this output device.

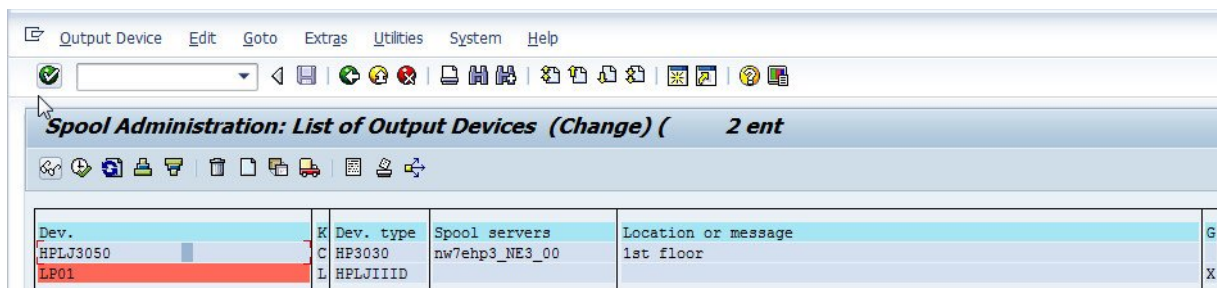

For example go to t-code **sm50** and then click on **list** from menu, click on **print** option, spool request will be created(**0000000xxxxx**)

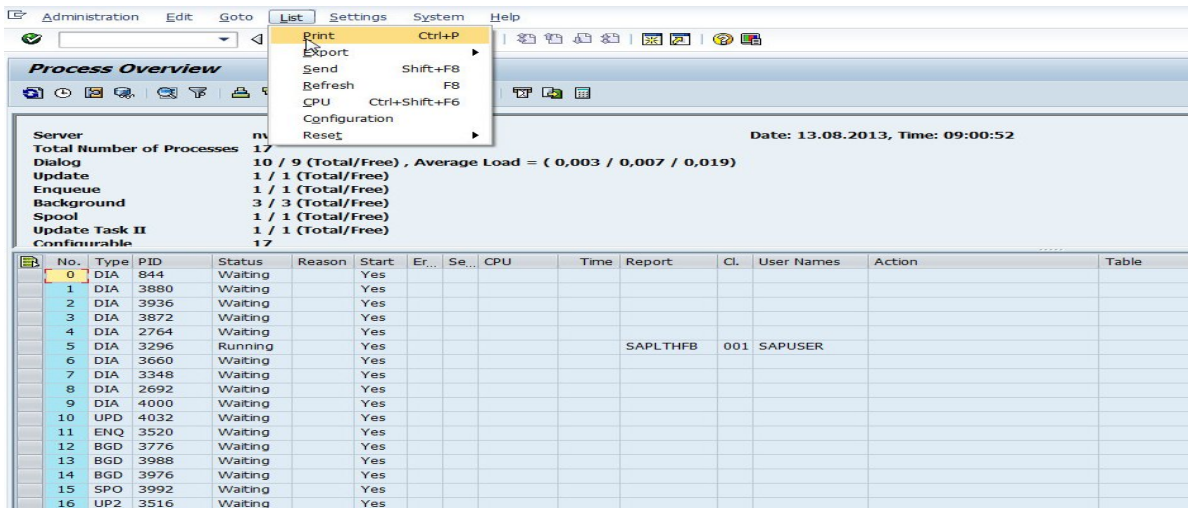


5. Select the device type – **No of copies – print pages**


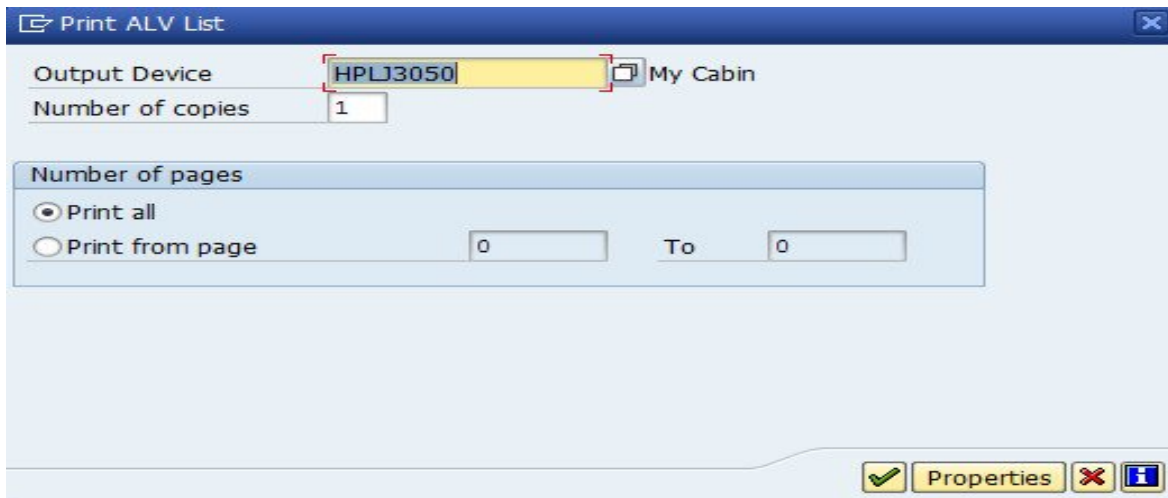


6. You can monitor the request s using Tcode – **SP01**

Enter the request number in **Output Requests** tab and **Execute**.

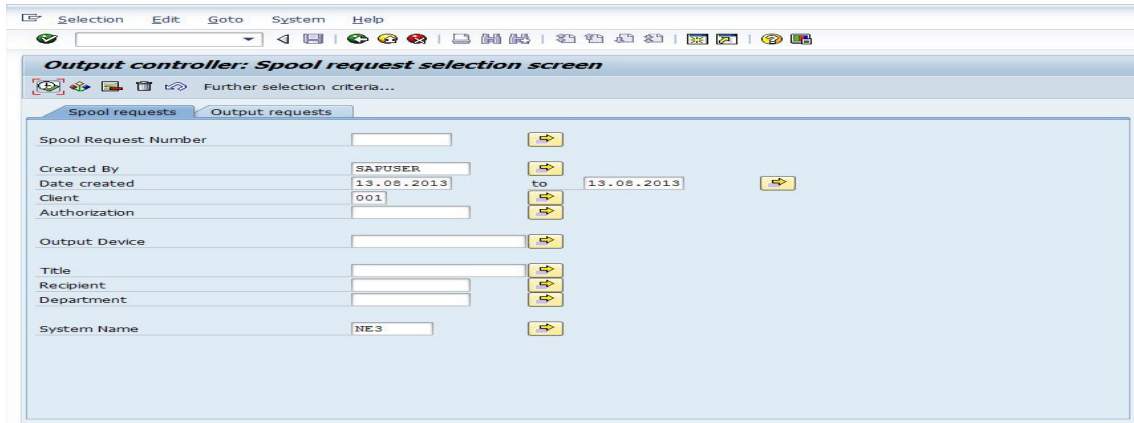

7. The below screen indicates **statusus** of the printer specific output request.

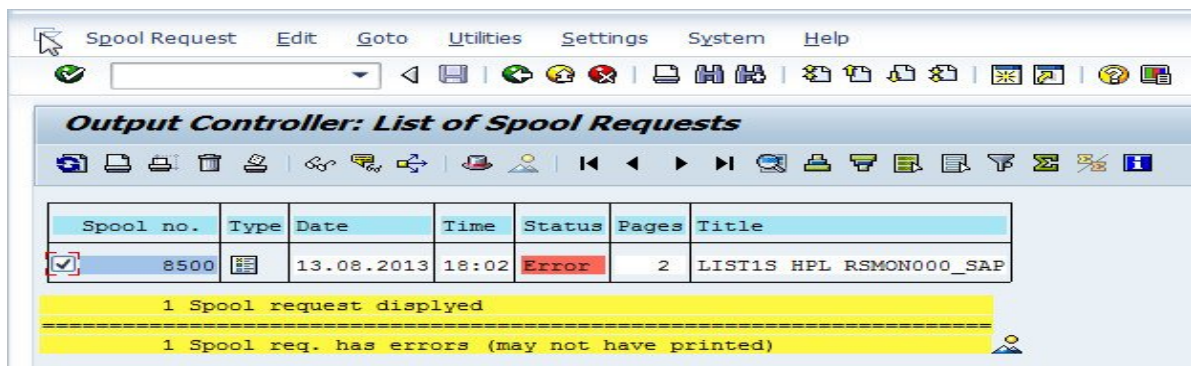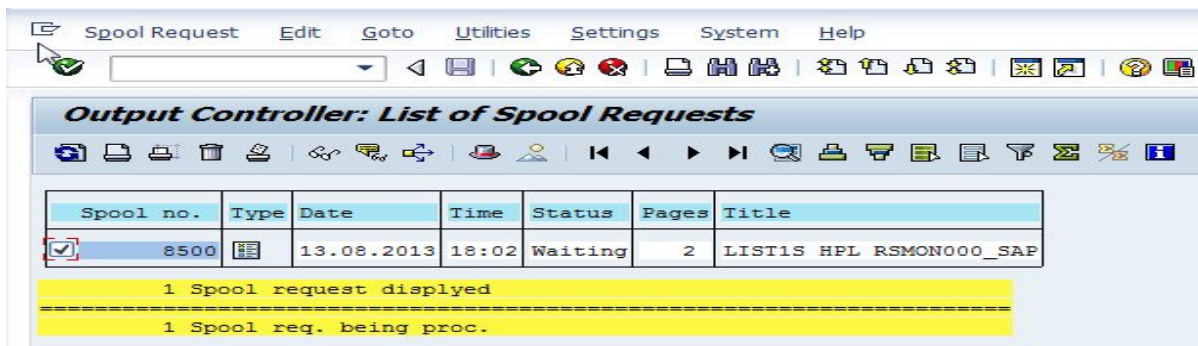



OUTPUT DEVICE CONFIGURATION

Confidential Document

Related Content:

<http://service.sap.com>

<http://support.sap.com>

www.help.sap.com

www.sdn.sap.com/irj/sdn/index.

Disclaimer and Liability Notice:

WILLSYS will not be held liable for any damages caused by using or misusing the information, code or methods suggested in this document, and anyone using these methods does so at his/her own risk.

WILLSYS offers no guarantees and assumes no responsibility or liability of any type with respect to the content of this technical article or code sample, including any liability resulting from incompatibility between the content within this document and the materials and services offered by WILLSYS. You agree that you will not hold, or seek to hold, WILLSYS responsible or liable with respect to the content of this document.