

HOW TO IMPORT TRANSPORT REQUEST AT OS LEVEL

STEP 1

- Create Transport Request in Source System. Then Release the Transport Request in SE01.
- Copy the changes request from Source system to Target system

```
[root@willsys2 cofiles]# scp -pr K900065.DEV root@192.168.1.152:/usr/sap/trans/cofiles/
root@192.168.1.152's password:
K900065.DEV          100% 436      0.4KB/s   00:00
[root@willsys2 cofiles]#
```

```
[root@willsys2 data]# scp -pr R900065.DEV root@192.168.1.152:/usr/sap/trans/data/
root@192.168.1.152's password:
R900065.DEV          100% 2890     2.8KB/s   00:00
[root@willsys2 data]#
```

STEP 2:

Go to Target System

Give the permission and Ownership for the Transport request in cofiles and data folde

- /usr/sap/trans/cofiles
- /usr/sap/trans/data

IMPORT TRANSPORT REQUEST AT OS LEVEL

Confidential Document


```
-rwxrwxr-x 1 qasadm sapsys 724 Jan 7 08:21 K900045.DEV
-rw-rw---- 1 qasadm sapsys 772 Jan 7 08:21 K900043.DEV
-rw-rw---- 1 qasadm sapsys 772 Jan 7 08:21 K900041.DEV
-rw-rw---- 1 qasadm sapsys 724 Jan 7 08:21 K900024.DEV
-rw-rw---- 1 qasadm sapsys 1348 Jan 7 08:21 K900006.DEV
-rw-rw-r-- 1 qasadm sapsys 598 Jan 10 14:33 KD70038.SAP
-rw-rw-r-- 1 qasadm sapsys 554 Jan 11 13:44 KB70010.SAP
-rw-rw---- 1 qasadm sapsys 39 Jan 21 08:42 TMS_TEST.QAS
-rw-rw-r-- 1 root root 436 Mar 11 2015 K900065.DEV
[root@willsys3 cofiles]# chmod -R 775 K900065.DEV
[root@willsys3 cofiles]# chown -R qasadm:sapsys K900065.DEV
[root@willsys3 cofiles]#
```

STEP 3:

Login to <SID>adm User

First add Transports Request in the buffer with below command:

tp addtobuffer <TR Number> <SID> pf=/usr/sap/trans/bin/<transport profile>

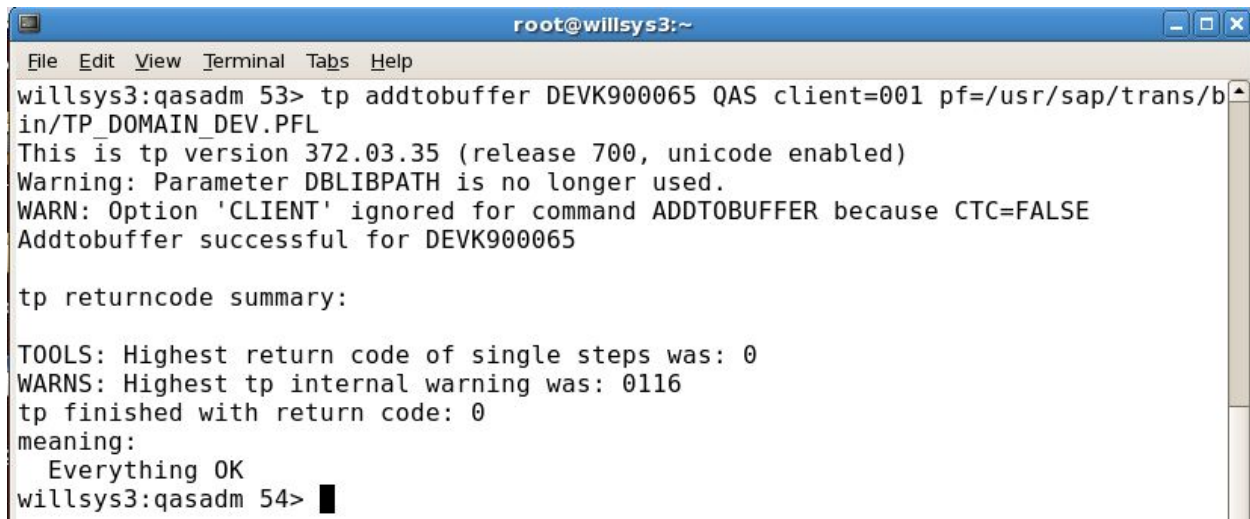


```
root@willsys3:~  
File Edit View Terminal Tabs Help  
willsys3:qasadm 53> tp addtobuffer DEVK900065 QAS client=001 pf=/usr/sap/trans/bin/TP_DOMAIN_DEV.PFL  
This is tp version 372.03.35 (release 700, unicode enabled)  
Warning: Parameter DBLIBPATH is no longer used.  
WARN: Option 'CLIENT' ignored for command ADDTOBUFFER because CTC=FALSE  
Addtobuffer successful for DEVK900065  
  
tp returncode summary:  
  
TOOLS: Highest return code of single steps was: 0  
WARNS: Highest tp internal warning was: 0116  
tp finished with return code: 0  
meaning:  
Everything OK  
willsys3:qasadm 54> █
```

STEP 4:

Import Transport Requests using tp command

tp import <transport number>LIE<SID> CNT=<client number> pf=/usr/sap/trans/bin/<transport profile>

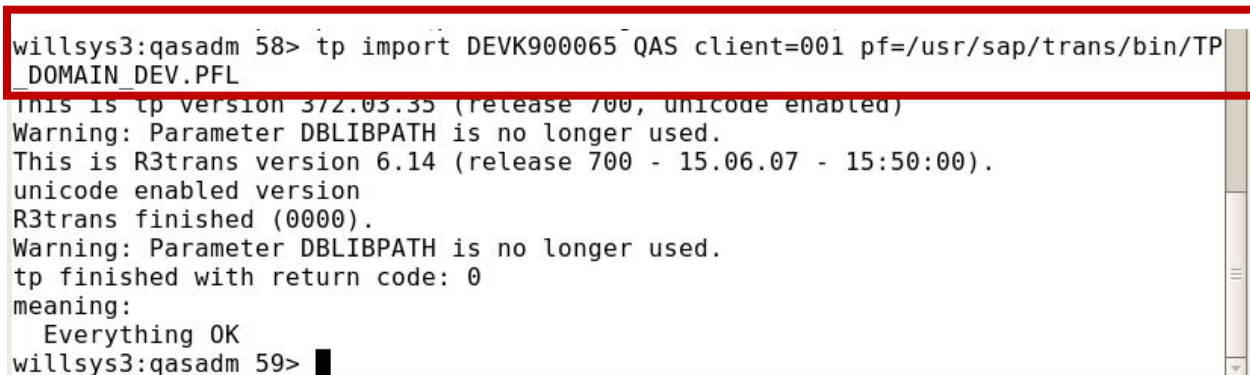

```
willsys3:qasadm 58> tp import DEVK900065 QAS client=001 pf=/usr/sap/trans/bin/TP_DOMAIN_DEV.PFL  
This is tp version 372.03.35 (release 700, unicode enabled)  
Warning: Parameter DBLIBPATH is no longer used.  
This is R3trans version 6.14 (release 700 - 15.06.07 - 15:50:00).  
unicode enabled version  
R3trans finished (0000).  
Warning: Parameter DBLIBPATH is no longer used.  
tp finished with return code: 0  
meaning:  
Everything OK  
willsys3:qasadm 59> █
```

STEP 5:

Login to SAP. Then check status.

Related Content:

www.help.sap.com

www.sdn.sap.com/irj/sdn/index.

Disclaimer and Liability Notice:

WILLSYS will not be held liable for any damages caused by using or misusing the information, code or methods suggested in this document, and anyone using these methods does so at his/her own risk.

WILLSYS offers no guarantees and assumes no responsibility or liability of any type with respect to the content of this technical article or code sample, including any liability resulting from incompatibility between the content within this document and the materials and services offered by WILLSYS. You agree that you will not hold, or seek to hold, WILLSYS responsible or liable with respect to the content of this document.